



# World of Automation

## Chapter 4: Signal converting relays

**HIQUEL**<sup>®</sup>  
HIGH QUALITY ELECTRONICS

[www.hiquel.com](http://www.hiquel.com)




## 4 Chapter 4: signal converting relays

- .01 K4S/K2W**
- .02 DMVR**
- .03 K1S/K1W**
- .04 SW1/SW2/SW3**
- .05 ANU/ANI**
- .06 LSM**
- .07 MU-PT100/MU-PT1000**
- .08 MU-TC**
- .09 MU-UI**
- .10 MU-DMS**
- .11 K1T/K2T**
- .12 TV../TD..**

# K4S/K2W

## overview


- ◆ PLC transistor output to power switching converter
- ◆ relay output max. 6A
- ◆ coil voltage 24V= or 12V=
- ◆ common positive or negative
- ◆ LED indicators for output relays
- ◆ 22.5mm DIN rail mount housing




## specification

<b>coil voltage</b>	nominal voltage +10% / -15%	
<b>duty cycle</b>	100%	
<b>output relay specification</b>	max. 6A 230V~	
<b>relay type</b>	1	
le AC-15*	120V~	5A
le AC-15*	240V~	4A
le DC-13*	24V=	4A
<b>expected life time</b>	DPCO	SPCO
mechanical	2 x 10 <sup>6</sup>	resp. 1 x 10 <sup>7</sup> operations
electrical	1 x 10 <sup>5</sup>	resp. 1 x 10 <sup>5</sup> operations
<b>screws</b>	pozidrive 1	
<b>screw tightening torque</b>	0,6..0,8Nm	
<b>operating conditions</b>	-20 to +60°C non condensing	
	* EN 60947-5-1 VDE 0435	


K4S-24P, K4S-12P

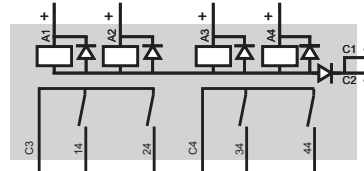


K4S-24N, K4S-12N

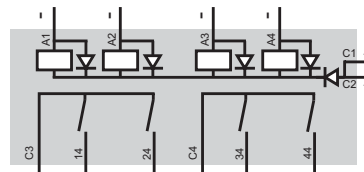

K2W-24P, K2W-12P








K2W-24N, K2W-12N



## ordering information

part no	supply	output	relay type	CE	housing type
K4S-24P	24V= 360mW	4 x SPNO	1	-	B
K4S-24N	24V= 360mW	4 x SPNO	1	-	B
K4S-12P	12V= 360mW	4 x SPNO	1	-	B
K4S-12N	12V= 360mW	4 x SPNO	1	-	B
K2W-24P	24V= 360mW	2 x SPCO	1	-	B
K2W-24N	24V= 360mW	2 x SPCO	1	-	B
K2W-12P	12V= 360mW	2 x SPCO	1	-	B
K2W-12N	12V= 360mW	2 x SPCO	1	-	B



# DMVR


## overview



- ◆ multi-voltage relay
- ◆ SPCO or DPCO output max. 6A
- ◆ coil voltage 24-240V~=  
◆ LED indicators for supply voltage and output relay
- ◆ 22.5mm DIN rail mount housing

### PLC interface relay 24-240Vac/dc

- Supply voltage on
- Supply voltage off
- Output relay contact closed
- Output relay contact open



## specification

<b>coil voltage</b>	nominal voltage +10% / -15%		
<b>duty cycle</b>	100%		
<b>relay type</b>	1	3	
<b>output relay spec</b>	230V~	6A	10A
le AC-15*	120V~	4A	5A
le AC-15*	240V~	3A	4A
le DC-13*	24V=	2A	4A
<b>expected life time</b>	DPCO	SPCO	
mechanical	2 x 10 <sup>6</sup>	resp.	1 x 10 <sup>7</sup> operations
electrical	1 x 10 <sup>5</sup>	resp.	1 x 10 <sup>5</sup> operations
<b>screws</b>	pozidrive 1		
<b>screw tightening torque</b>	0,6..0,8Nm		
<b>operating conditions</b>	-20 to +60°C non condensing		

\* EN 60947-5-1 VDE 0435

## ordering information

part no	supply	output	relay type		housing types
<b>DMVR</b>	24 - 240V~= 2VA	SPCO	3	-	A
<b>DMVR2</b>	24 - 240V~= 2VA	DPCO	1	-	B

other voltages on request

# K1S/K1W

## overview

- ◆ PLC transistor output to power switching converter
- ◆ relay output max. 10A SP relay  
1.25A DP relay
- ◆ coil voltage 230V~ or 24V~
- ◆ common positive or negative
- ◆ LED indicator for relay status
- ◆ 11.25mm DIN rail mount housing



## specification

<b>coil voltage</b>	nominal voltage +10% / -15%		
<b>duty cycle</b>	100%		
<b>nominal current</b>	15mA		
<b>suppressor circuit</b>	freewheeling diode and varistor		
<b>relay type</b>	1	2	
<b>output relay spec.</b>	230V~	10A	2A
le AC-15*	120V~	1,5A	-
le AC-15*	240V~	1,5A	-
le DC-13*	24V=	1,5A	-
on delay	<8ms	<12ms	
off delay	<25ms	<25ms	
contact material	AgCdO	AgNi+Au (5µm)	
switching voltage	250V~	250V~	
input current	15A	2A	
continuous current	10A	1,25A	
min. switching capacity	>5mA	>1mA	
max. switching frequency	600/h	360/h	
mechanical	2 x 10 <sup>6</sup> resp. 1 x 10 <sup>7</sup> operations		
electrical	1 x 10 <sup>5</sup> resp. 1 x 10 <sup>5</sup> operations		
<b>screw tightening torque</b>	0,5Nm		
<b>operating conditions</b>	-20 to +60°C non condensing		


\* EN 60947-5-1 VDE 0435

## ordering information


part no	supply	output	relay type	certification	housing type
<b>K1S 24Vac/dc</b>	24V~ = 355mW	1 x SPNO	1	-	○
<b>K1S 230Vac/dc</b>	230V~ = < 1,2W	1 x SPNO	1	-	○
<b>K1W 24Vac/dc</b>	24V~ = 355mW	SPCO	1	-	○
<b>K1W 230Vac/dc</b>	230V~ = < 1,2W	SPCO	1	-	○
<b>K2W 24Vac/dc</b>	24V~ = 355mW	DPCO	2	-	○
<b>K1W-S</b>	24V~ = 355mW	SPCO	1	-	○
<b>K1W-S-R</b>	24V~ = 355mW	SPCO	1	-	○

other voltages on request


K1S




K1W





K2W







K1W-S



K1W-S-R



PLC interface relay in 11.25mm housing



# SW1/SW2/SW3

## overview



- ◆ coil voltage 24V~=
- ◆ SPCO output max. 10A
- ◆ trigger input with 1/0/Auto switch
 

SW1	3,0V ON	2,5V OFF
SW2	7,0V ON	6,5V OFF
SW3	2,0V ON	1,5V OFF
- ◆ LED indicators for output
- ◆ 11.25mm DIN rail mount housing

### SW1/SW2/SW3:

The SW triggers are designed to control pumps, fans, burners etc. They are also designed to operate with an analogue 0-10VDC control signal.



#### Trigger Function

As soon as the input voltage reaches the operating threshold (ON), in AUTO Mode, the relay pulls in. If the input voltage falls below the cut off threshold (OFF), the relay drops out again.

A manual control facility with feedback contact, (mode 1) is incorporated for manual operation

The module can be operated in two modes which can be selected by the three-position switch (Auto, 0, 1).

1. Switch position "1": The output relay is controlled via terminals A1, A2
2. Switch position "Auto": The output relay is controlled by the trigger through terminals YR. The operating voltage must be available continuously at terminal A1.
3. Switch position "0": The relay is switched off. Input signals at terminals A1 or YR are ineffective.

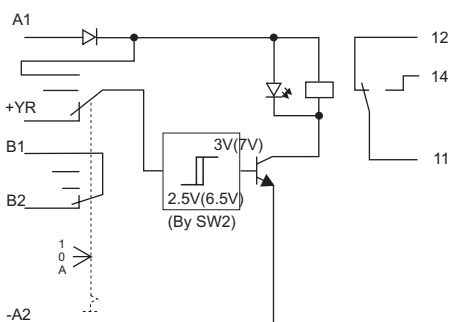

## specification

coil voltage	nominal voltage +10% / -15%
duty cycle	100%
nominal current	15mA
suppressor circuit	freewheeling diode and varistor
relay type	1
output relay spec	230V~ 10A
le AC-15*	120V~ 5A
le AC-15*	240V~ 4A
le DC-13*	24V= 4A
on delay	<8ms
off delay	<25ms
contact material	AgCdO
switching voltage	250V~
input current	16A
continuous current	10A
min. switching capacity	5mA
max. switching frequency	600/h
mechanical	2 x 10 <sup>6</sup> resp. 1 x 10 <sup>7</sup> operations
electrical	1 x 10 <sup>5</sup> resp. 1 x 10 <sup>5</sup> operations
screw tightening torque	0,5Nm
operating conditions	-20 to +60 °C non condensing

\* EN 60947-5-1 VDE 0435

## ordering information

part no	supply	output	relay type	CS	housing types
SW1 24Vac/dc	24V~= 600mW	SPCO	1	-	○
SW2 24Vac/dc	24V~= 600mW	SPCO	1	-	○
SW3 24Vac/dc	24V~= 600mW	SPCO	1	-	○

# ANU/ANI

## overview

- ◆ supply voltage 24V~
- ◆ feedback contact for manual or automatic mode
- ◆ protection against incorrect connection
- ◆ short circuit protection
- ◆ LED indicator proportional to output level
- ◆ 22.5mm DIN rail mount housing



### Description:

ANU/ANI are used with automatic control systems (BMS, PLC, PC) that provide a 0-10V or 0-20mA signal for controlling variables such as temperature, speed, position etc.

In automatic mode ("Auto") the analogue signal from the control system (terminals YR & L) is re-transmitted to the controlled device (ratio 1:1).

In manual mode ("Manu") the analogue signal from the control system is isolated and the ANU/ANI inject a signal (terminals Y & ) which can be adjusted from 0 to 10V or 0-20mA by the potentiometer.

The switch position (mode) can be monitored externally on terminals S1 - S2 (feed-back contact).


The brightness of the LED "Y" is proportional to the output signal level.

The output is short circuit protected.

## specification

<b>supply voltage variation</b>	nominal voltage +20% / -15%
<b>frequency range</b>	48 - 63 Hz
<b>duty cycle</b>	100%
<b>nominal current</b>	24V~/35mA    24V~/11mA
<b>contact material</b>	silver alloy
<b>switch</b>	S1-S2    28V~/2A
<b>current consumption</b>	max. $I_r$ 10V <sub>DC</sub> 2mA
<b>screws</b>	pozidrive 1
<b>screw tightening torque</b>	0,6..0,8Nm
<b>operating conditions</b>	-20 to +60°C non condensing

### ANU



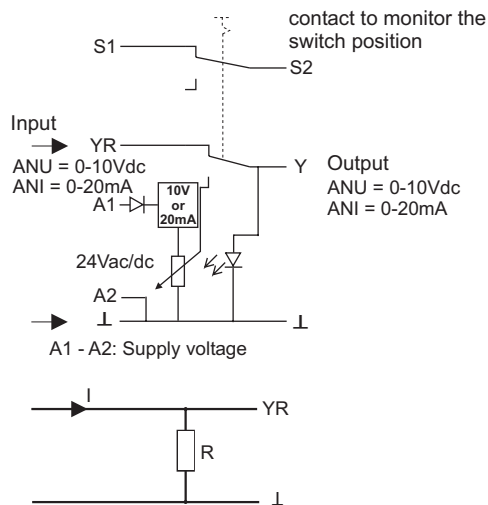


Application with ANU: Input 0-20mA; Output 0-10Vdc


Current input with external resistor is possible.  
z.B.: 0-20mA and R = 500 Ohm  
terminal YR to terminal L = 0 - 10V

## ordering information

part no	supply	output	relay type	HIQUEL	housing type
ANU	24V~ < 1VA	0-10V=	-	-	B
ANI	24V~ < 1VA	0-20mA=	-	-	B








### Description:

The LSM was designed specifically to control two-speed fan motors. The LSM is controlled by a two-position switch, which is connected directly to the LSM (S1, S2). The motor contactors are controlled by the two outputs (K1, K2).

The LSM will automatically control the speed selection so that the operator cannot switch the fan on from stand-still to high speed, or off when running in high speed.



The 3 functions are:

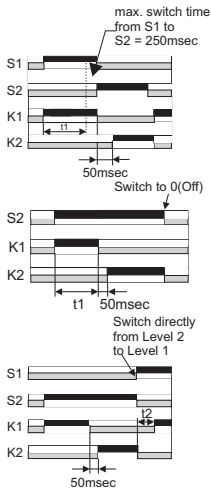

1.) In switch position 1 the motor will run in low speed during the set time t1. After the time t1 has expired it is possible to switch over to position 2 for high speed. The switch over time is max. 250 msec. If this is exceeded the LSM goes to function 2.

2.) If switch position 2 (high speed) is selected before switch position 1, the motor will be forced to run for the time t1 (low speed). After t1 there will be an interval of 50 msec before the motor goes into high speed.

3.) Once in high speed, if the input is switched from position 2 to position 1 Or 0 (=stop), the high speed contact will switch off and the motor will be free wheel for the duration of timer t2 after which the low speed contact will switch on if the switch is in position 1, or will coast to a stop if switch position 0 is selected.



# LSM

## overview

- ◆ power supply 230V~
- ◆ 2 adjustable timers
- ◆ 2 relay outputs 230V~
- ◆ LED indicators for level 1+2
- ◆ 22.5mm DIN rail mount housing

## specification

<b>supply voltage variation</b>	nominal voltage +10% / -15%	
<b>frequency range</b>	48-63Hz	
<b>duty cycle</b>	100%	
<b>repeat accuracy</b>	< 1% of the selected range	
<b>output relay specification</b>	max. 6A 230V~	
<b>relay type</b>	1	
le AC-15*	120V~	5A
le AC-15*	240V~	4A
le DC-13*	24V=	4A
<b>expected life time</b>	DPCO	SPCO
mechanical	2 x 10 <sup>6</sup>	resp. 1 x 10 <sup>7</sup> operations
electrical	1 x 10 <sup>5</sup>	resp. 1 x 10 <sup>5</sup> operations
<b>screws</b>	pozidrive 1	
<b>screw tightening torque</b>	0,6..0,8Nm	
<b>operating conditions</b>	-20 to +60 °C non condensing	

\* EN 60947-5-1 VDE 0435

## ordering information

part no	supply	output	relay type		housing types
LSM 230Vac	230V~ 8VA	2 x SPNO	1	-	A



# MU-PT100/PT1000

## overview

- ◆ temperature to analogue signal transducer
- ◆ high linearity, long term stability, high accuracy
- ◆ 4 selectable temperature ranges
- ◆ current and voltage outputs
- ◆ 2, 3 or 4 wire PT sensor connections
- ◆ 22.5 or 45mm DIN rail mount housing



## Description

The offset of the output signal is selected with the first DIP switch, the measurement range is selected with the other two DIP switches.


The different probe connection types are detected automatically.

The use of shielded and twisted-pair cable is recommended. Connect the shield of the cable (if used) to the connector "I-". "U+"/"U-" and "I+"/"I-" are twisted together (if twisted cable used).

Do not lay the PT probe cable close to supply voltage cables.

## specification

<b>supply voltage variation</b>	nominal voltage +10% / -10%
<b>input</b>	PT100/PT1000
<b>connection</b>	2, 3 or 4 wire
<b>temperature ranges</b>	-30°C to 100°C 0°C to 100°C 0°C to 200°C 0°C to 300°C
<b>current output</b>	
accuracy	<0,1%
max. output load	550 Ohm
temperature coefficient	<0,01%/K
<b>voltage output</b>	
accuracy	<0,3%
max. output current	<5mA
temperature coefficient	<0,01%/K
<b>screws</b>	pozidrive 1
<b>screw tightening torque</b>	0,6..0,8Nm
<b>operating conditions</b>	-20 to +60°C non condensing

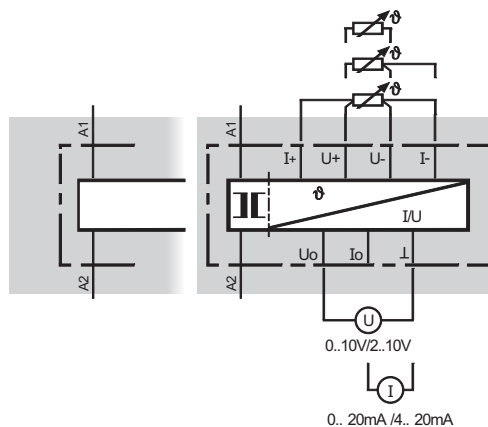

## ordering information

part no	supply	sup. galv. iso.*	UL 95	housing type
MU-PT100/24Vdc	24V= 1,5W	no	-	B
MU-PT100/24Vac	24V~ 2,5VA	yes	-	B
MU-PT100/115Vac	115V~ 2,5VA	yes	-	C
MU-PT100/230Vac	230V~ 2,5VA	yes	-	C
MU-PT1000/24Vdc	24V= 1,5VA	no	-	B
MU-PT1000/24Vac	24V~ 2,5VA	yes	-	B
MU-PT1000/115Vac	115V~ 2,5VA	yes	-	C
MU-PT1000/230Vac	230V~ 2,5VA	yes	-	C

\* PT100/PT1000 and the output signals are galvanically isolated from the power supply



temperature transducer PT100/PT1000



# MU-TC

## overview


- ◆ thermocouple to analogue signal transducer
- ◆ supply voltage 24Vdc
- ◆ high linearity, long term stability
- ◆ high temperature stability
- ◆ selectable thermocouple input
- ◆ 23mm DIN rail mount housing

### Description:

MU-TC uses microprocessor-controlled high resolution 16-bit dual-slope, integrating A/D converter to acquire a thermocouple signal and cold junction compensation input.

The configurable input offers a wide range of J, K, T, R, S, E, B type thermocouples and the output is linear to temperature. Therefore, stock investment for spare parts can be reduced and the highest system flexibility can be achieved.

Thermoelements			
Type	1	2	3
J	ON	ON	ON
K		ON	ON
T	ON		ON
R			ON
S	ON	ON	
E		ON	



## specification

<b>supply voltage</b>	24V= ±10%	
<b>power consumption</b>	1.4W	
<b>input</b>	Type "J"	-40°C...760°C
	Type "K"	0°C...1000°C
	Type "T"	-100°C...400°C
	Type "E"	0°C...1000°C
	Type "S"	500°C...1750°C
	Type "R"	500°C...1750°C
<b>output</b>	0-10V	0.5 Ohm
	<b>temperature drift</b>	±2°C
<b>isolation</b>	1.000V=	
<b>screw tightening torque</b>	0,5Nm	
<b>operating conditions</b>	0 to +50°C non condensing	

## ordering information

part no	supply	output	relay type	OS	housing types
MU-TC	24V=	0-10V=	-	-	I

# MU-UI

## overview

- ◆ strain-gauge to analogue signal transducer
- ◆ supply voltage 24V=
- ◆ high linearity, long term stability
- ◆ high temperature stability
- ◆ selectable input and output signal
- ◆ 23mm DIN rail mount housing



transducer for strain gauge sensors

## Specification

<b>supply voltage</b>	24V= 10%
<b>power consumption</b>	0,85 Watt voltage output 1,2 Watt current output
<b>input</b>	
Bipolar	+/-10mV, 0/-50mV, +/-100mV, +/-0,5V, +/-1V, +/-5V, +/-10V; +/-20mA
Unipolar	0-10mV, 0-50mV, 0-100mV, 0-500mV, 0-1V, 5-5V, 0-10V; 0-20mA
<b>output</b>	
Bipolar	+/-5V, +/-10V
Unipolar	0-10V 0-20mA
<b>accuracy</b>	+/- 0,1% FSR (typ.)
<b>temperature drift</b>	150ppm typ
<b>screw tightening torque</b>	0,5Nm
<b>operating conditions</b>	0 to +50°C non condensing

		Input Range (SW2)							
Bipolar	Unipolar	1	2	3	4	5	6	7	8
+/-10mV	0-10mV	ON							
+/-50mV	0-50mV		ON						
+/-100mV	0-100mV			ON					
+/-0,5mV	0-0,5V				ON				
+/-1V	0-1V					ON			
+/-5V	0-5V						ON		
+/-10V	0-10V								
+/-20mA	0-20mA								ON

Table 1: switch positions of input

		Output Range (SW1)							
Output Range	Input Range	1	2	3	4	5	6	7	8
-5V	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA	ON		ON					ON
	0-10mV, 0-50mV, 0-100mV, 0-0,5V, 0-1V	ON		ON		ON			ON
	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA		ON		ON			ON	
0-20mA	0-10mV, 0-50mV, 0-100mV, 0-0,5V, 0-1V, 0-10V		ON		ON				ON
	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA	ON		ON					ON
	0-10mV, 0-50mV, 0-100mV, 0-0,5V, 0-1V, 0-10V	ON		ON		ON			ON
-10V	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA	ON		ON					ON
	0-10mV, 0-50mV, 0-100mV, 0,5V, -1V, -5V, -20mA	ON		ON					ON
	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA	ON		ON				ON	
0-10V	0-10mV, 0-50mV, 0-100mV, 0-0,5V, 0-1V, 0-10V	ON		ON					ON
	-10mV, -50mV, -100mV, 0,5V, -1V, -5V, -20mA	ON		ON					ON
	0-10mV, 0-50mV, 0-100mV, 0-0,5V, 0-1V, 0-10V	ON		ON		ON			ON

Table 2: switch positions of output

## Configuration

Figure 1 shows the terminal wiring of MU-UI. Positive power terminals 9 and 7 are internally connected, as are negative terminals 12 and 10. MU-UI uses single 24V=.

Tables 1 and 2 above show the switch positions to configure input and output range. The I/O configuration switches are located inside the module. To reach the switches, you need to remove the DIN-rail bracket by sliding it down.








Figure 1. terminal wiring of MU-UI

## ordering information

part no	supply	output	relay type	HIQUEL	housing type
MU-UI	24V=	+/-5V, +/-10V, 0-10V, 0-20mA	-	-	I





# MU-DMS

## overview



- ◆ isolated strain-gauge to analogue signal transducer
- ◆ supply voltage 24V=
- ◆ high linearity, long term stability
- ◆ high temperature stability
- ◆ selectable output signal
- ◆ adjustment of user specified signals
- ◆ 23mm DIN rail mount housing

Input Range (SW2)					
Range	1	2	3	4	5
+/-10mV	ON				
+/-20mV		ON			
+/-30mV			ON		
+/-50mV				ON	
+/-100mV					ON

Table 1: switch positions of input

Output Range (SW1)								
Range	1	2	3	4	5	6	7	8
+/- 5V	ON		ON					ON
+/- 10V	ON		ON					
0-10V	ON		ON				ON	
0-20mA		ON		ON			ON	

Table 2: switch positions of output

### Configuration

Figure 1 shows the terminal wiring of MU-DMS. Positive power terminals 9 and 7 are internally connected, as are negative terminals 12 and 10. MU-DMS uses single 24V=.

Tables 1 and 2 above show the switch positions to configure input and output range. The I/O configuration switches are located inside the module. To reach the switches, you need to remove the DIN-rail bracket by sliding it down.

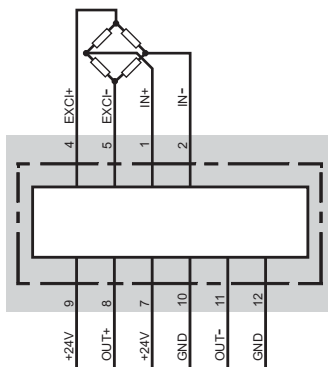


Figure 1. Terminal wiring of MU-DMS

## specification

<b>supply voltage</b>	24V= ± 10%
<b>power consumption</b>	1,85 Watt at voltage output 2,15 Watt at current output
<b>input</b>	+/-10mV, +/-20mV, +/-30mV, +/-50mV, +/-100mV max. 60mA
<b>output</b>	Bipolar +/-5V, +/-10V Unipolar 0-10V 0-20mA 0-500Ohm (load.)
<b>accuracy</b>	+/- 0,1% FSR (typ.)
<b>temperature drift</b>	150ppm typ
<b>screw tightening torque</b>	0,5Nm
<b>operating conditions</b>	-10 to +70°C non condensing

## ordering information

part no	supply	output	relay type	CS	housing types
MU-DMS	24V= 2W	+/-5V, +/-10V, 0-10V, 0-20mA	-	-	I

# K1T/K2T

## overview

- ◆ interface relay with photomos output
- ◆ wide voltage range (different ranges)
- ◆ 10kHz bandwidth
- ◆ LED indicators
- ◆ protected against incorrect polarity
- ◆ K1T - one line coupler
- ◆ K2T - two line couplers
- ◆ 22.5mm DIN rail mount housing



## specification

<b>supply voltage</b>	nominal voltage $\pm 10\%$
<b>duty cycle</b>	100%
<b>protection circuit</b>	VDR
<b>voltage deviation</b>	$\pm 20\%$ (duration of deviation less than 5s, no output change)
<b>turn-on time</b>	
DC-version	$< 10\mu\text{s}$
AC/DC-version	$< 20\text{ms}$
<b>turn-off time</b>	
DC-version	$< 40\mu\text{s}$
AC/DC-version	$< 40\text{ms}$
<b>isolation voltage</b>	2,5kV
<b>on-state voltage</b>	$< 3\text{V}$
<b>output voltage range</b>	24Vac/dc.. 230Vac/dc
<b>max. load current</b>	500mA ac/dc
<b>output</b>	photomos
<b>screws</b>	pozidrive 1
<b>screw tightening torque</b>	0,6..0,8Nm
<b>operating conditions</b>	-20 to $+60^\circ\text{C}$ no condensing

\* EN 60947-5-1 VDE 0435

## ordering information


part no	input	Ri*	Icont*	(Uout · Iout)MAX@f	f@MAX(Uout · Iout)	housing type
<b>K1T 12Vdc..30Vdc</b>	12V=..30V=	1,5k $\Omega$	$< 8\text{mA}$	(230V*500mA)@1Hz	10.000Hz@(230V*40mA)	B
<b>K1T 12Vac/dc..30Vac/dc</b>	12V~/=..30V~/=	1,5k $\Omega$	$< 8\text{mA}$	(230V*500mA)@1Hz	5Hz@(230V*100mA)	B
<b>K1T 24Vac/dc..230Vac/dc</b>	24V~/=..230~/=	6,0k $\Omega$	$< 21\text{mA}$	(230V*500mA)@1Hz	5Hz@(230V*100mA)	B
<b>K2T 12Vdc..30Vdc</b>	12V=..30V=	1,5k $\Omega$	$< 8\text{mA}$	(230V*500mA)@1Hz	10.000Hz@(230V*40mA)	B
<b>K2T 12Vac/dc..30Vac/dc</b>	12V~/=..30V~/=	1,5k $\Omega$	$< 8\text{mA}$	(230V*500mA)@1Hz	5Hz@(230V*100mA)	B
<b>K2T 24Vac/dc..230Vac/dc</b>	24V~/=..230V~/=	6,0k $\Omega$	$< 21\text{mA}$	(230V*500mA)@1Hz	5Hz@(230V*100mA)	B

other voltage on request



\* Ri = power-on input resistance

\* Icont = current through input pin after 5 sec

K2T xxac/dc

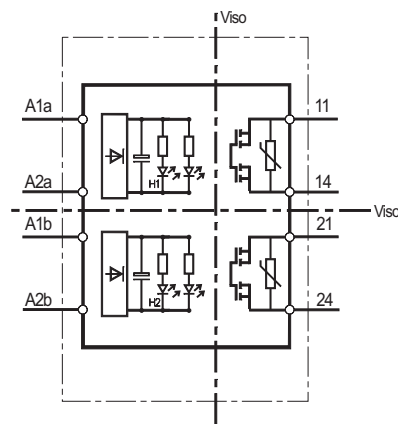


K2T xxdc

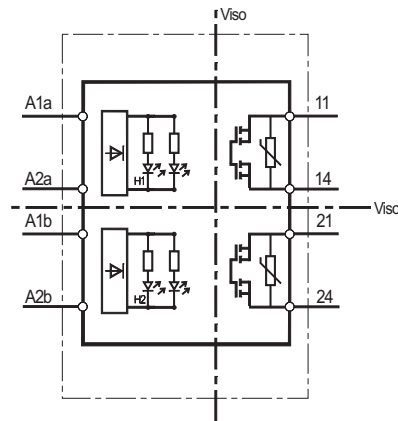




# TV../TD..

## overview

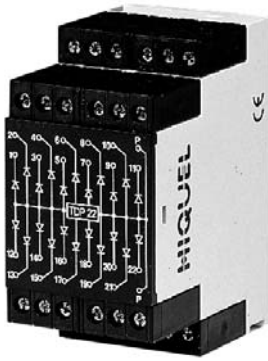


- ◆ multi way diode boxes
- ◆ common cathode for alarm integration
- ◆ common anode for lamp testing
- ◆ up to 34 1000v diodes in one housing
- ◆ 22.5/45/67.5mm DIN rail housing or 11pin plug in housing


TDM 10




TDM 22



TDM 34




TVM 10




Multi-way diode box for the integration of multiple alarm circuits where any one of a number of alarm signals will activate an output.


TDP 10




TDP 22



TDP 34



TVP 10



Multi-way diode box for lamp testing where one switch connected to the diode box input will test the continuity of lamp circuits.

## specification

diode max current	1,0 A
diode max voltage	1000 V
diode voltage drop	0,7 V
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60°C non condensing

## ordering information

part no	supply	output	relay type	RLS	housing type
TVM 10	10	1	-	-	G
TVP 10	1	10	-	-	G
TDM 10	10	2	-	-	B
TDP 10	2	10	-	-	B
TDM 22	22	2	-	-	D
TDP 22	2	22	-	-	D
TDM 34	34	2	-	-	F
TDP 34	2	34	-	-	F

# HIR6W

## interface relays

### Overview



- Interface relay **HIR6W** consists of:
  - socket **HI6W**,
  - changeover relay, rated load 6 A / 230 V (AC)
- 35 mm DIN rail mount, EN 50022, wires connection with screw terminals - 0,2..4 mm<sup>2</sup>
- Adapted for the co-operation with interconnection strip type ZG20

### Contact data

Number and type of contacts		1C/O	
Contact material		<b>AgSnO<sub>2</sub></b> , AgSnO <sub>2</sub> /Au 3 μm	
Max. switching voltage	AC/DC	AgSnO <sub>2</sub> : 250 V / 300 V	AgSnO <sub>2</sub> /Au 3 μm: 30 V / 36 V
Min. switching voltage	AC/DC	AgSnO <sub>2</sub> : 12 V	AgSnO <sub>2</sub> /Au 3 μm: 100 mV
Rated load	AC1	AgSnO <sub>2</sub> : 6 A / 230 V AC	AgSnO <sub>2</sub> /Au 3 μm: 50 mA / 30 V AC
	DC1	AgSnO <sub>2</sub> : 6 A / 24 V DC	AgSnO <sub>2</sub> /Au 3 μm: 50 mA / 36 V DC
Min. switching current		AgSnO <sub>2</sub> : 8 mA / 24 V	AgSnO <sub>2</sub> /Au 3 μm: 2 mA / 24 V
Max. inrush current (20 ms)		AgSnO <sub>2</sub> : 15 A	AgSnO <sub>2</sub> /Au 3 μm: 100 mA
Rated current		6 A	
Max. breaking capacity	AC1	AgSnO <sub>2</sub> : 1 500 VA	AgSnO <sub>2</sub> /Au 3 μm: 1,2 VA
Min. breaking capacity		AgSnO <sub>2</sub> : 0,3 W	AgSnO <sub>2</sub> /Au 3 μm: 0,01 W
Contact resistance		AgSnO <sub>2</sub> : ≤ 100 mΩ 100 mA, 24 V	AgSnO <sub>2</sub> /Au 3 μm: ≤ 30 mΩ 10 mA, 5 V
Max. operating frequency	AC1	• at rated load	
		• no load	
		360 cycles/hour	72 000 cycles/hour

### Input control circuit

Rated voltage	DC	24
Must release voltage		AC: ≥ 0,2 U <sub>n</sub> AC: ≥ 0,5 U <sub>n</sub> ① DC: ≥ 0,1 U <sub>n</sub>
Operating range of supply voltage		see Table 1
Must operate voltage		AC and DC: ≤ 0,8 U <sub>n</sub> AC: 0,6...0,85 U <sub>n</sub> ①    DC: ≤ 0,8 U <sub>n</sub> ①
Rated power consumption	DC	0,3 W
	AC/DC	0,3...2,1 VA / 0,3...1,0 W



# HIR6W


## interface relays

### Input data




Relay code	Rated input voltage $U_n$	Power if input control circuit	Input – voltage range V	
			min.	max.
HIR6W-1P-24VDC	24 V DC	0.3 W	19.2	28.0

### Dimensions

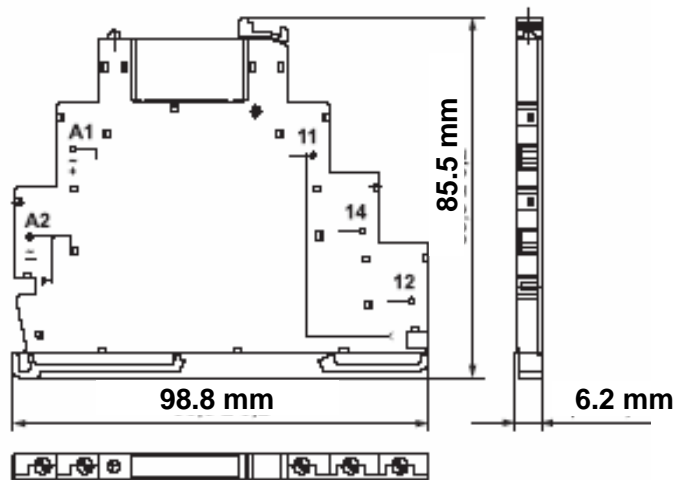

### Connection diagrams

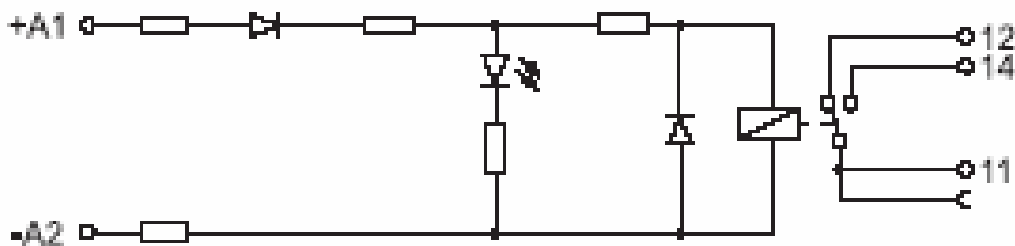

### Mounting

Relays **HIR6W** are designed for 35 mm DIN rail mount, EN 50022. For relays **HIR6W** are offered description plates type **HI6W-1246**.

**HIR6W** are adapted for the co-operation with interconnection strip type **ZG20**. Interconnection strip **ZG20** allows to common bridging outputs or inputs. Maximum current rate is 36 A.

**SRSI- CC20 Busbar available in 20 way**

