



World of Automation



Chapter 1: General information

HIQUEL®
HIGH QUALITY ELECTRONICS

www.hiquel.com



HIQUEL

HIGH QUALITY ELECTRONICS

new dimension in time ...



















All drawings, plans, sketches, specifications and other documents and materials relating to Goods produced by or for use are our property. All intellectual property rights in or relating to the Goods (including without limitation copyright and patents) belong to and are reserved by us and neither the Buyer nor any other person, firm or corporation shall have any right or licence to reproduce or use the same for the repair of the Goods for any other purpose whatsoever without our prior written consent. All information relating to the Goods (other than information in the public domain) is confidential and any disclosure to any third party requires our prior written consent.

The editors and publishers accept no responsibility for any inadvertent omission of entries or for typographical or other errors.

We shall not be liable for any delay or failure in performing any obligation through any circumstances beyond our control.

We reserve the right to alter specifications in the interests of technical progress.

CATALOGUE GUIDE

-  ◆ number of closing contacts
-  ◆ number of changing contacts
-  ◆ DIN-Rail mounting
-  ◆ 11 pin plug in
-  ◆ timer functionality
-  ◆ real time clock
-  ◆ protection class
-  ◆ temperature measurement function
-  ◆ PTC (Thermistor) measurement function
-  ◆ 3 phase measurement function
-  ◆ diode array
-  ◆ thyristor output
-  ◆ voltage measurement function
-  ◆ current measurement function
-  ◆ liquid level control
-  ◆ speed control
-  ◆ UL certification
-  ◆ CE conformity

monitoring & control relays


timing relays

signal converting relays

special purpose



housing types

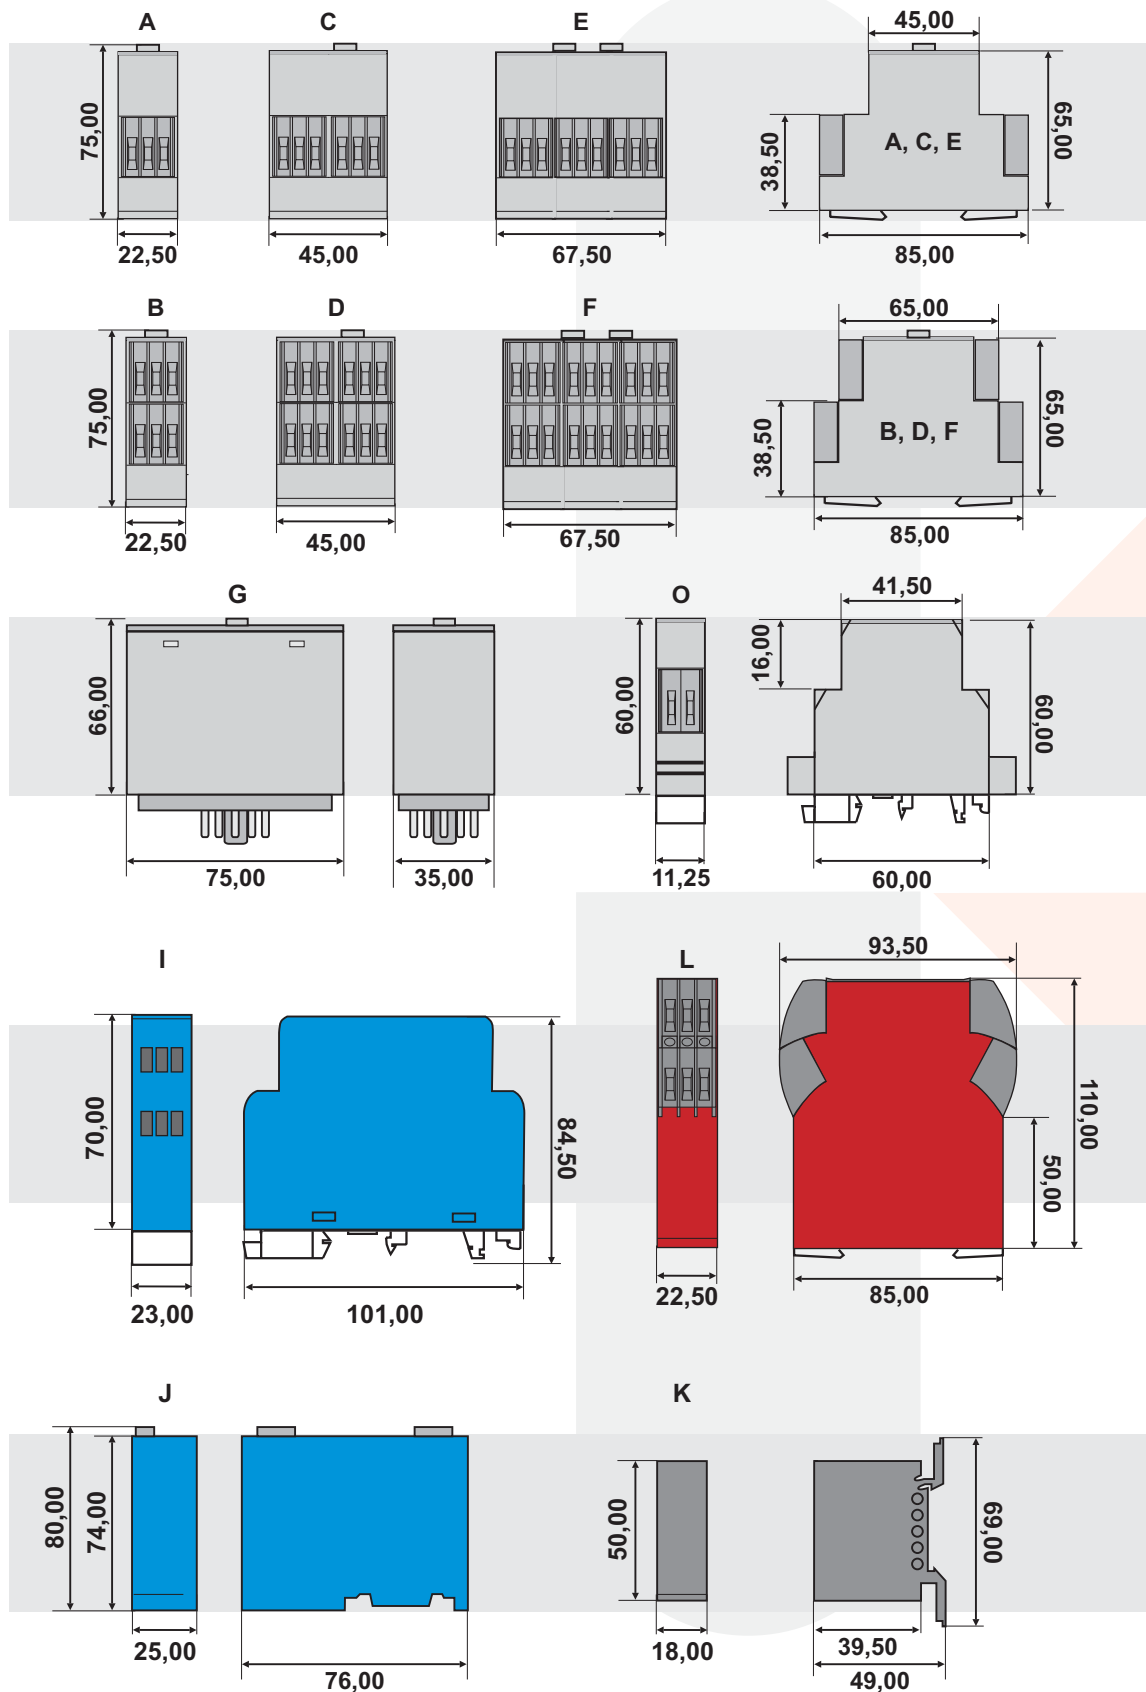

DIN-rail
terminals: IP20
housing: IP50
all dimensions in mm



World of Automation



Chapter 3: Timing relays

HIQUEL®
HIGH QUALITY ELECTRONICS

www.hiquel.com



3 Chapter 3: Timing relays

- .01 ITM16**
- .02 ITM216**
- .03 ITM17**
- .04 TM**
- .05 TE/DER**
- .06 TR**
- .07 TB**
- .08 TW**
- .09 ITA**
- .10 TA**
- .11 ITS16**
- .12 TS**
- .13 ITI16**
- .14 TI**
- .15 ITT16**
- .16 DES/PES/TES**
- .17 DER-M**
- .18 PRER2/TOE/TOR**

ITM16


overview

- ◆ multi-function timing relay
- ◆ all common supply voltages on one unit
- ◆ 9 selectable timing ranges (1sec - 10d)
- ◆ 10 selectable timing functions
- ◆ SPCO configuration
- ◆ LED indicators for power supply, failure, status of the output relay, control contact & timer
- ◆ 22.5mm DIN rail mount housing



Multifunction

- Supply voltage (U) on
- Supply voltage (U) off
- Starting contact S on B1 closed
- Starting contact S on B1 open
- Output relay contact closed
- Output relay contact open
- Time is running





Functions:

- E...On delay
- Es...On delay with external control input
- Rs...Off delay with external control input
- W...On pulse single shot
- Ws...On pulse single shot with external control input
- Os...Off pulse with external control input
- Bi...Symmetrical recycler pulse first
- Bp...Symmetrical recycler pause first
- Bis...Symmetrical recycler pulse first with external control input
- Ts...Bistable

Time ranges

1s, 10s, 30s, 1m, 10m, 1h, 10h, 1d, 10d

The required delay time within the range selected is set using the potentiometer on the front.



specification

supply voltage variation	nominal voltage -20%...+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	< 1%
output relay specification	max. 6A 230V~
Ue/Ie AC-15	24V/1,5A 115V/1,5A 230V/1,5A
Ue/Ie DC-13	24V/1,5A
expected life time	SPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20°C bis +60 °C non condensing * EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	housing types
ITM16	24V~ / 115..230V~	6VA / 1W	SPCO	L

* The measurement input is galvanically isolated from the power supply

multi-function



ITM216


overview

- ◆ multi-function timing relay
- ◆ all common supply voltages on one unit
- ◆ 9 selectable time ranges (1sec - 10d)
- ◆ 3 selectable parallel functions
- ◆ 10 selectable timing functions
- ◆ 2x SPCO configuration
- ◆ LED indicators for power supply, failure, status of the output relay, control contact & timer
- ◆ 22.5mm DIN rail mount housing



Multifunction

- Supply voltage (U) on
- Supply voltage (U) off
- Starting contact S on B1 closed
- Starting contact S on B1 open
- Output relay contact closed
- Output relay contact open
- Time is running





Functions:

- E...On delay
- Es...On delay with external control input
- Rs...Off delay with external control input
- Ws...On pulse single shot
- Ws...On pulse single shot with external control input
- Os...Off pulse with external control input
- Bi...Symmetrical recycler pulse first
- Bp...Symmetrical recycler pause first
- Bis...Symmetrical recycler pulse first with external control input
- Ts...Bistable

Time ranges

1s, 10s, 30s, 1m, 10m, 1h, 10h, 1d, 10d

The required delay time within the range selected is set using the potentiometer on the front.



specification

supply voltage variation	nominal voltage -20%..+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	<1%
output relay specification	max. 6A 230V~
Ue/Ie AC-15	24V/1,5A 115V/1,5A 230V/1,5A
Ue/Ie DC-13	24V/1,5A
expected life time	2 SPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20°C bis +60 °C non condensing


* EN 60947-5-1 VDE 0435



ordering information

part no	supply	output	relay type	housing types
ITM216	24V~ / 115..230V~	6VA / 1W	2x SPCO	L

* The measurement input is galvanically isolated from the power supply

multi-function






ITM17

overview

- ◆ multi-function timing relay
- ◆ all common supply voltages on one unit
- ◆ 2 separate timers
- ◆ 9 selectable time ranges
- ◆ 14 selectable timing functions
- ◆ SPCO configuration
- ◆ LED indicators for power supply, failure, status of the output relay, control contact and timers
- ◆ 22.5mm DIN rail mount housing

Multifunction

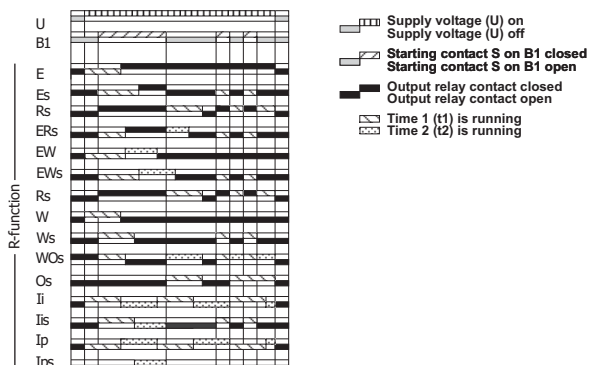



Functions

- E...On delay
- Es...On delay with external control input
- Rs...Off delay with external control input
- ERs...On delay and off delay with external control input
- EW...On delay and on pulse / delayed single shot
- EWs...On delay and on pulse / delayed single shot with external control input
- W...On pulse single shot
- Ws...On pulse single shot with external control input
- WOs...On pulse and off pulse with external control input
- Os...Off pulse with external control input
- Ii...Asymmetrical recycler pulse first
- Iis...Asymmetrical recycler pulse first with external control input
- Ip...Asymmetrical recycler pause first
- Ips...Asymmetrical recycler pause first with external control input

Time ranges

1s, 10s, 30s, 1m, 10m, 1h, 10h, 1d, 10d

The required delay time within the range selected is set using the potentiometer on the front plate.



specification

supply voltage variation	nominal voltage -20%..+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	< 1%
output relay specification	max. 6A 230V~
Ue/Ie AC-15	24V/1,5A 115V/1,5A 230V/1,5A
Ue/Ie DC-13	24V/1.5A
expected life time	SPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20°C .. +60 °C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	housing types
ITM17	24V~ / 115..230V~	6VA / 1W	SPCO	L

* The measurement input is galvanically isolated from the power supply


- ◆ single, dual, multi & zoom supply voltage options
- ◆ 8 timing functions selected by DIP switch
- ◆ SPCO or DPCO output relay
- ◆ 6 selectable time ranges 0.1sec - 10 Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing

specification

supply voltage variation		nominal voltage +10% / -15%		
		TM16 +10% / -10%		
		TM20,TM21,TM81,TM82 +5% / -10%		
supply selection		TM16/T3F selectable by a switch		
frequency range		48 - 63 Hz		
duty cycle		100%		
repeat accuracy		< 1% of the selected range		
relay type		1	2	3
output relay spec	230V~	6A	12A	10A
	le AC-15* 120V~	4A	2,5A	5A
	le AC-15* 240V~	3A	2,5A	4A
	le DC-13* 24V=	2A	2,0A	4A
expected life time		DPCO	SPCO	
mechanical		2 x 10 ⁶	resp. 1 x 10 ⁷ operations	
electrical		1 x 10 ⁵	resp. 1 x 10 ⁵ operations	
screws		pozidrive 1		
screw tightening torque		0,6..0,8Nm		
operating conditions		-20 to +60°C non condensing		
		* EN 60947-5-1 VDE 0435		

* EN 60947-5-1 VDE 0435

ordering information


part no	supply	output	relay type		housing type	
TM01	230V~ / 24V~=	6VA / 1VA	DPCO	1	yes	B
TM16	115 - 230V~ / 24V~=	6VA / 1VA	SPCO	2	yes	A
TM20	24 - 240V~=	2VA	SPCO	3	yes	A
TM21	24 - 240V~=	2VA	DPCO	1	yes	B
TM41	230V~ / 24V~=	6VA / 1VA	DPCO	1	no	G
TM42	230V~ / 24V~=	6VA / 1VA	SPCO	1	no	G
TM71	230V~ w. transformer	1,5VA	DPCO	1	no	G
TM72	230V~ w. transformer	1,5VA	SPCO	1	no	G
TM81	24 - 240 V~=	2VA	DPCO	1	no	G
TM82	24 - 240 V~=	2VA	SPCO	1	no	G
T3F*	115 - 230V~ / 24V~=	6VA / 1VA	SPCO	2	yes	A

other voltages on request



Multifunction

- Starting contact S on B1 closed
- Starting contact S on B1 open
- Supply voltage(U) on
- Supply voltage(U) off
- Output relay contact closed
- Output relay contact open

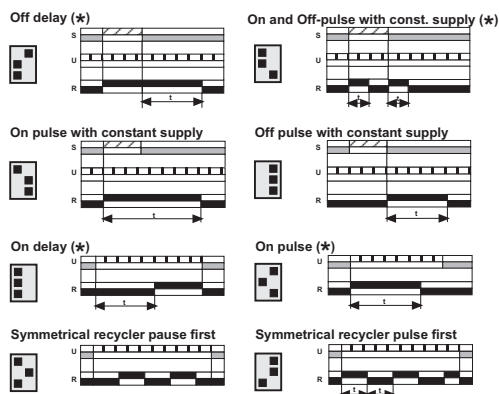


Remove supply voltage before making any changes to either time range or timing function.


(*) available T3F functions

A detailed description of each of the timing functions will be found on the following 'single function' type pages.

Time ranges




The required delay time within the range selected is set using the potentiometer on the front plate.

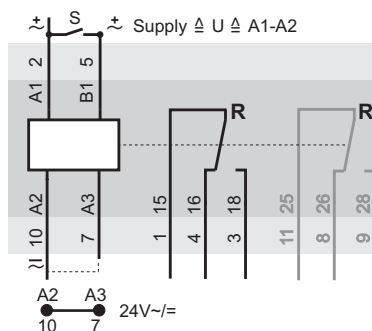



On delay

- Supply voltage on
Supply voltage off
- Output relay contact closed
Output relay contact open

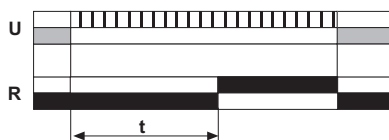


Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage, time delay t commences. At the end of the time delay the output relay pulls in. When the supply voltage is removed the output relay drops out and the time relay resets ready for the next timing cycle. If the supply voltage is removed during time t , the output relay will drop out, the unexpired time will be cancelled and the time relay will reset.

Time ranges



The time ranges are selected using the DIP switch settings illustrated left, and the required delay time is set using the potentiometer on the front plate.

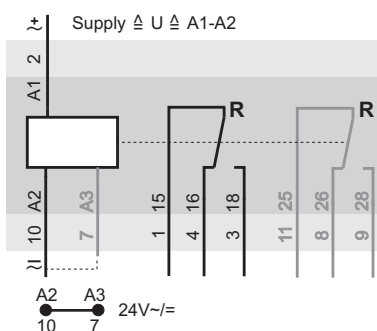

part no	supply	output	relay type	HIQUEL	housing types
TE01	230V~ / 24V~	6VA / 1W	DPCO	1	yes B
TE04	115V~ / 24V~	6VA / 1W	DPCO	1	yes B
DER230	230V~ / 24V~	6VA / 1W	SPCO	2	yes A
DER115	115V~ / 24V~	6VA / 1W	SPCO	2	yes A
TE12	230V~	6VA	SPCO	2	yes A
TE13	24V~	1W	SPCO	2	yes A
TE15	115V~	6VA	SPCO	2	yes A
TE41	230V~ / 24V~	6VA / 1W	DPCO	1	no G
TE42	230V~ / 24V~	6VA / 1W	SPCO	1	no G
TE71	230V~ w. transf.	2VA	DPCO	1	no G

other voltages on request

TE/DER

overview

- single or dual supply voltage options
- SPCO or DPCO output relay
- 6 selectable time ranges
- LED indicators for power supply and contact
- 22.5mm DIN rail mount housing or 11pin plug in housing

specification

supply voltage variation	nominal voltage +10% / -15%	
frequency range	48 - 63 Hz	
max. delay time	100%	
repeat accuracy	< 1% of the selected range	
relay type	1	2
output relay spec	230V~	6A 10A
le AC-15*	120V~	4A 5A
le AC-15*	240V~	3A 4A
le DC-13*	24V=	2A 4A
expected life time	DPCO	SPCO
mechanical	2 x 10 ⁶	resp. 1 x 10 ⁷ operations
electrical	1 x 10 ⁵	resp. 1 x 10 ⁵ operations
screws	pozidrive 1	
screw tightening torque	0,6..0,8Nm	
operating conditions	-20 to +60°C non condensing	

* EN 60947-5-1 VDE 0435

ordering information


TR

overview

- ◆ single or dual supply voltage options
- ◆ SPCO or DPCO output relay
- ◆ 6 selectable time ranges 0.1sec - 10Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing



Off delay



Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage the time relay energises ready for the timing cycle. When the starting contact **S** is closed the output relay pulls in immediately. Time delay **t** starts when the starting contact is opened and the output relay drops out at the end of the time delay. If the supply voltage is removed before, or during time **t**, the output relay will drop out immediately and the time relay will reset ready for the next timing cycle.


Important application note:

On types **TR12,13 & 15** only, small inductive devices (relays etc.), can be connected between the **B1** terminal and ground (-ve) such that they energise when the **A1-B1** start contact is made. A snubber circuit should be included for larger devices. **Do not do this on types TR01 & 04.**

Time ranges



The time ranges are selected using the DIP switch settings illustrated left, and the required delay time is set using the potentiometer on the front plate.

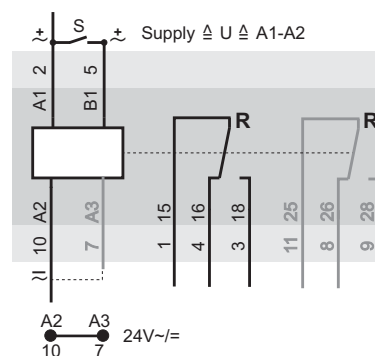

specification

supply voltage variation		nominal voltage +10% / -15%	
frequency range		48 - 63 Hz	
max. delay time		100%	
repeat accuracy		< 1% of the selected range	
relay type		1	2
output relay spec	230V~	6A	10A
le AC-15*	120V~	4A	5A
le AC-15*	240V~	3A	4A
le DC-13*	24V=	2A	4A
expected life time		DPCO	SPCO
mechanical		2 x 10 ⁶	resp. 1 x 10 ⁷ operations
electrical		1 x 10 ⁵	resp. 1 x 10 ⁵ operations
screws		pozidrive 1	
screw tightening torque		0,6..0,8Nm	
operating conditions		-20 to +60°C non condensing	

* EN 60947-5-1 VDE 0435

ordering information


part no	supply	output	relay type	HIQUEL	housing type
TR01	230V~/24V~=-	6VA / 1W	DPCO	yes	B
TR04	115V~/24V~=-	6VA / 1W	DPCO	yes	B
TR12	230V~	6VA	SPCO	yes	A
TR13	24V~=-	1W	SPCO	yes	A
TR15	115V~	6VA	SPCO	yes	A
TR41	230V~ / 24V~=-	6VA / 1W	DPCO	no	G
TR42	230V~ / 24V~=-	6VA / 1W	SPCO	no	G
TR71	230V~ w. transf.	2VA	DPCO	no	G
TR72	230V~ w. transf.	2VA	SPCO	no	G

other voltages on request



Symmetrical recycler

Supply voltage on
Supply voltage off
Output relay contact closed
Output relay contact open

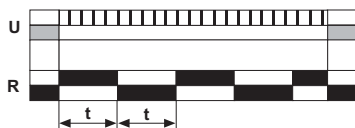


Remove supply voltage before making any changes together time range or timing function.

On the application of the supply voltage the output relay pulls in and timing period t starts.
At the end of time t the output relay drops out and remains dropped out for a period equal to time t .
An on-off action with a 1:1 time ratio continues until the supply voltage is removed when the time relay will reset ready for the next timing cycle.
If the supply voltage is removed during an 'On' period the output relay will drop out immediately, the remaining time will be cancelled and the time relay resets ready for the next timing cycle.

Time ranges

0,1s-1,0s	1,0s-10s	0,1min-1,0min	1,0min-10min	0,1h-1,0h	1,0h-10h

The required delay time within the range selected is set using the potentiometer on the front plate

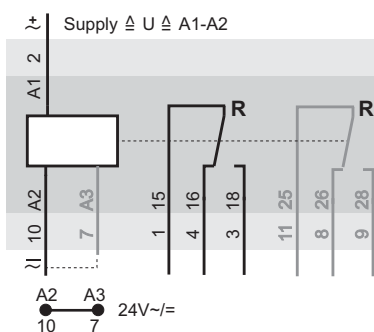

TB

overview

- ◆ single or dual supply voltage options
- ◆ SPCO or DPCO output relay
- ◆ 6 selectable time ranges 0.1 sec - 10Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing

specification

supply voltage variation	nominal voltage +10% / -15%	
frequency range	48 - 63 Hz	
max. delay time	100%	
repeat accuracy	< 1% of the selected range	
relay type	1 2	
output relay spec	230V~	6A 10A
le AC-15*	120V~	4A 5A
le AC-15*	240V~	3A 4A
le DC-13*	24V=	2A 4A
expected life time	DPCO	SPCO
mechanical	2 x 10 ⁶ resp. 1 x 10 ⁷ operations	
electrical	1 x 10 ⁵ resp. 1 x 10 ⁵ operations	
screws	pozidrive 1	
screw tightening torque	0,6..0,8Nm	
operating conditions	-20 to +60°C non condensing	

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type		housing types
TB01	230V~ / 24V~	6VA / 1W	DPCO	1	yes B
TB04	115V~ / 24V~	6VA / 1W	DPCO	1	yes B
DBR230	230V~ / 24V~	6VA / 1W	SPCO	2	yes A
DBR115	115V~ / 24V~	6VA / 1W	SPCO	2	yes A
TB12	230V~	6VA	SPCO	2	yes A
TB13	24V~	1W	SPCO	2	yes A
TB15	115V~	6VA	SPCO	2	yes A
TB41	230V~ / 24V~	6VA / 1W	DPCO	1	no G
TB42	230V~ / 24V~	6VA / 1W	SPCO	1	no G
TB71	230V~ w. transf.	2VA	DPCO	1	no G

other voltages on request

- ◆ single or dual supply voltage options
- ◆ SPCO or DPCO output relay
- ◆ 6 selectable time ranges 0.1sec - 10Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing

specification

supply voltage variation	nominal voltage +10% / -15%	
frequency range	48 - 63 Hz	
max. delay time	100%	
repeat accuracy	< 1% of the selected range	
relay type	1	2
output relay spec	230V~	6A 10A
le AC-15*	120V~	4A 5A
le AC-15*	240V~	3A 4A
le DC-13*	24V=	2A 4A
expected life time	DPCO	SPCO
mechanical	2 x 10 ⁶ resp. 1 x 10 ⁷ operations	
electrical	1 x 10 ⁵ resp. 1 x 10 ⁵ operations	
screws	pozidrive 1	
screw tightening torque	0,6..0,8Nm	
operating conditions	-20 to +60°C non condensing	

* EN 60947-5-1 VDE 0435

ordering information


part no	supply	output	relay type	HIQUEL [®]	housing type
TW01	230V~ / 24V~=	6VA / 1W	DPCO	1	yes B
TW04	115V~ / 24V~=	6VA / 1W	DPCO	1	yes B
DWR230	230V~ / 24V~=	6VA / 1W	SPCO	2	yes A
DWR115	115V~ / 24V~=	6VA / 1W	SPCO	2	yes A
TW12	230V~	6VA	SPCO	2	yes A
TW13	24V~=	1W	SPCO	2	yes A
TW15	115V~	6VA	SPCO	2	yes A
TW41	230V~ / 24V~=	6VA / 1W	DPCO	1	no G
TW42	230V~ / 24V~=	6VA / 1W	SPCO	1	no G
TW71	230V~ w. transf.	2VA	DPCO	1	no G

other voltages on request



On pulse

Supply voltage on
Supply voltage off
Output relay contact closed
Output relay contact open



Remove supply voltage before making any changes to either time range or timing function.


On the application of the supply voltage the output relay pulls in for the duration of time t and then drops out. The time relay resets ready for the next timing cycle when the supply voltage is removed.

If the supply voltage is removed during time t the output relay drops out, the remaining time is cancelled and the time relay resets.

Time ranges

0,1s-1,0s	1,0s-10s	0,1min-1,0min	1,0min-10min	0,1h-1,0h	1,0h-10h
-----------	----------	---------------	--------------	-----------	----------


The required delay time within the range selected is set using the potentiometer on the front plate.

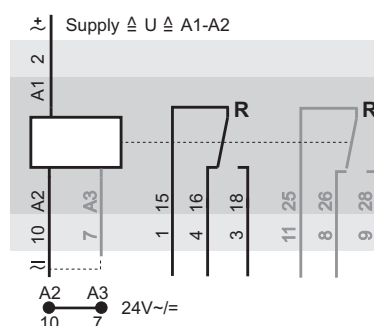




Multifunction of true off delay

- Supply voltage (U) on
- Supply voltage (U) off
- Starting contact S on B1 closed
- Starting contact S on B1 open
- Output relay contact closed
- Output relay contact open
- Time 1 (t1) is running
- Time 2 (t2) is running



Functions:

- Ra...Off delay without auxiliary voltage
- Wa...On pulse single shot without auxiliary voltage
- Oa...Off pulse without auxiliary voltage
- Ta...Bistable without auxiliary voltage
- ERa...On- and off delay without auxiliary voltage
- WOa...On pulse single shot and off pulse without auxiliary voltage
- Ewa...On delay and on pulse single shot without auxiliary voltage

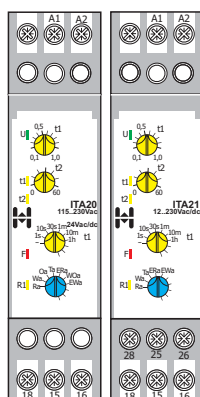


Time range t1

1s, 10s, 30s, 1m, 10m, 1h

The required delay time within the range selected is set using the potentiometer on the front plate.

Time range t2

fixed 60s



ITA

overview

- ◆ zoom supply voltage
- ◆ SPCO or DPCO output relay
- ◆ 6 selectable time ranges (up to 1hrs)
- ◆ LED indicators for power supply, failure, relay status and timer
- ◆ 22.5mm DIN rail mount housing

specification

supply voltage variation	nominal voltage +10% / -15%
frequency range	43-63 Hz
duty cycle	100%
repeat accuracy	< 1% of the selected range
output relay specification	230V~ 10A
le AC-15*	120V~ 2,5A
le AC-15*	240V~ 2,5A
le DC-13*	24V= 2,5A
expected life time	
mechanical	5 x 10 ⁶ operations
electrical	1 x 10 ⁴ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60 °C non condensing
* EN 60947-5-1 VDE 0435	

ordering information

part no	supply	output	housing types
ITA20	12..230V~ =	0,2W SPCO	L
ITA21	12..230V~ =	0,2W DPCO	L

TA


overview

- ◆ single or dual supply voltage options
- ◆ SPCO or DPCO output relay
- ◆ 4 selectable time ranges 1s - 3m
- ◆ LED indicators for supply voltage and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing



True off delay


Supply voltage on
 Supply voltage off
 Output relay contact closed
 Output relay contact open




Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage the output relay pulls in. When the supply voltage is removed the output relay remains pulled in and time delay t commences. At the end of the time delay the output relay drops out and the time relay resets ready for the next timing cycle. If the supply voltage is reapplied during time t , time t will not time out and the output relay will remain pulled in until the supply voltage is removed for a time longer than t .

Time ranges



The required delay time within the range selected is set using the potentiometer on the front plate

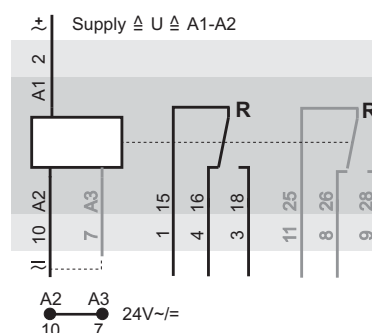

specification

supply voltage variation		nominal voltage +10% / -15%		
frequency range		48 - 63 Hz		
duty cycle		100%		
repeat accuracy		< 1% of the selected range		
relay type		4	5	
output relay spec.		230V~	8A	5A
le AC-15*		120V~	5A	4A
le AC-15*		240V~	5A	3A
le DC-13*		24V=	4A	3A
expected life time		DPCO		SPCO
mechanical		2 x 10 ⁶		resp. 1 x 10 ⁷ operations
electrical		1 x 10 ⁵		resp. 1 x 10 ⁵ operations
screws		pozidrive 1		
screw tightening torque		0,6..0,8Nm		
operating conditions		-20 to +60°C non condensing		
		* EN 60947-5-1 VDE 0435		

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	HIQUEL	housing types
TA01	230V~ / 24V~=	6VA / 1W	DPCO	yes	B
TA02	230V~	6VA	SPCO	yes	A
TA03	24V~=	1W	SPCO	yes	A
TA04	115V~ / 24V~=	6VA / 1W	DPCO	yes	B
TA05	115V~	6VA	SPCO	yes	A
TA41	230V~ / 24V~=	6VA / 1W	DPCO	yes	G
TA42	230V~ / 24V~=	6VA / 1W	SPCO	yes	G
TA71	230V~ w. transf.	2VA	DPCO	yes	G
TA72	230V~ w. transf.	2VA	SPCO	yes	G


other voltages on request

true off delay (without supply voltage)







Star-Delta-Timer

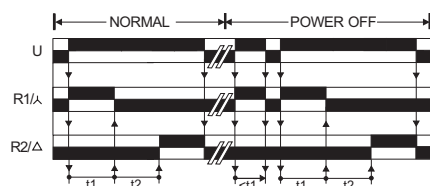

Time ranges

1s, 10s, 30s, 1m, 10m, 1h, 10h, 1d, 10d and
40, 50, 60, 80, 100, 120, 150, 200, 300, 400ms

The required delay time within the range selected is set using the potentiometer on the front plate.



ITS16

overview

- ◆ Star-Delta-Start
- ◆ All common supply voltages on one unit
- ◆ 4 selectable time ranges
- ◆ 10 selectable dwell times
- ◆ 2 x SPCO configuration
- ◆ LED indicators for power supply, failure, status of the output relay and timers
- ◆ 22.5mm DIN rail mount housing



specification

supply voltage variation	nominal voltage -20%..+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	<1%
output relay specification	max. 6A 230V~
Ue/Ie AC-15	24V/1,5A 115V/1,5A 230V/1,5A
Ue/Ie DC-13	24V/1,5A
expected life time	2 x SPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60 °C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	housing types
ITS16	24V~ / 115..230V~	6VA / 1W	2x SPCO	L


TS overview

- ◆ single or dual supply voltage options
- ◆ 2 x SPNO output relay
- ◆ 2 star period time ranges
- ◆ 4 dwell times selected by dip switch
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing



Star-delta start timer

- Supply voltage on
- Supply voltage off
- Output relay contact closed
- Output relay contact open




Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage the star relay pulls in immediately for the duration of the star time set. When the star time expires the star relay drops out and the dwell time begins. At the end of the dwell time the delta relay pulls in. When the supply voltage is removed the delta relay drops out and the time relay resets ready for the next timing cycle.

Time ranges


star time (=t1) required delay time is set using the potentiometer on the front plate



dwell time (=t2)



Supply \triangle U \triangle A1-A2

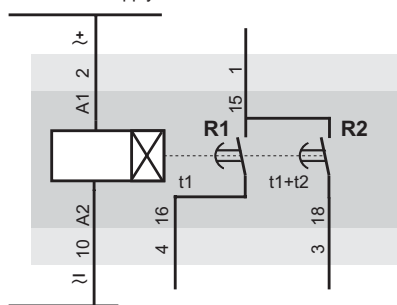


specification

supply voltage variation	nominal voltage +10% / -15%
frequency range	48 - 63 Hz
max. delay time	100% of the selected range
repeat accuracy	< 1% of the selected range
output relay specification	max. 10A 230V~
Ue/Ie AC-15*	120V/5A 240V/4A
Ue/Ie DC-13*	24V/4A
expected life time	SPNO
mechanical	1 x 10 ⁷ operations
electrical	1 x 10 ⁶ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60°C non condensing


* EN 60947-5-1 VDE 0435

ordering information

part no	supply		output	relay type		housing type
TS02	230V~	6VA	2 SPNO	-	yes	A
TS03	24V~	1W	2 SPNO	-	yes	A
TS05	115V~	6VA	2 SPNO	-	yes	A
TS06	415V~	6VA	2 SPNO	-	yes	A
TS42	230V~ / 24V~	6VA / 1W	2 SPNO	-	no	G
TS44	115V~ / 24V~	6VA / 1W	2 SPNO	-	no	G
TS72	230V~ w. transf.	2VA	2 SPNO	-	no	G
TS74	115V~ w. transf.	2VA	2 SPNO	-	no	G


other voltages on request






Asymmetrical recycler

- Supply voltage (U) on
- Supply voltage (U) off
- Starting contact S on B1 closed
- Starting contact S on B1 open
- Time 1 (t1) is running
- Time 2 (t2) is running



Functions:


- li...Asymmetrical recycler pulse first
- lp...Asymmetrical recycler pause first
- lihn...Asymmetrical recycler pulse first with normal inhibit
- lphn...Asymmetrical recycler pause first with normal inhibit
- lihv...Asymmetrical recycler pulse first with inverse inhibit
- lphv...Asymmetrical recycler pause first with inverse inhibit



Time ranges

1s, 10s, 30s, 1m, 10m, 1h, 10h, 1d, 10d

The required delay time within the range selected is set using the potentiometer on the front plate.



ITI16

overview

- ◆ asymmetrical recycler
- ◆ all common supply voltages on one unit
- ◆ 6 different asymmetrical functions
- ◆ 2 separate timers
- ◆ 9 selectable time ranges
- ◆ 'pulse first' or 'pause first' selectable function
- ◆ real pause function
- ◆ SPCO configuration
- ◆ LED indicators for power supply, failure, status of output relay, control contact & timer
- ◆ 22.5mm DIN rail mount housing

specification

supply voltage variation	nominal voltage -20%..+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	< 1%
output relay specification	max. 6A 230V~
Ue/Ie AC-15	24V/1,5A 115V/1,5A 230V/1,5A
Ue/Ie DC-13	24V/1,5A
expected life time	SPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20°C to +60 °C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	housing types
ITI16	24V~ = / 115..230V~	6VA / 1W	SPCO	L


- ◆ “pulse first” or “pause first” adjustable
- ◆ single, dual or zoom supply voltage options
- ◆ SPCO or DPCO output relay
- ◆ 2 x 6 selectable time ranges 0.1sec - 30Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing




Asymmetrical recycler

Supply voltage on
Supply voltage off
Output relay contact closed
Output relay contact open

asymmetrical recycler pause first

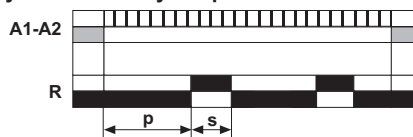

asymmetrical recycler signal first

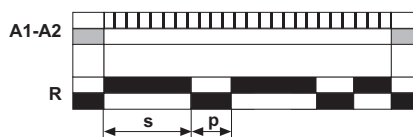

specification


supply voltage variation	nominal voltage +10% / -15%			
frequency range	48 - 63 Hz			
max. delay time	100%			
repeat accuracy	< 1% of the selected range			
relay type	1	2	3	4
output relay spec. R_{TH}	10A	10A	8A	6A
le AC-15* 115Vac	2,5A	1,5A	1,5A	3,5A
le AC-15* 230Vac	2,5A	1,5A	1,5A	3A
le DC-13* 24Vdc	2,5A	1,5A	1,5A	2,5A
expected life time	SPCO	SPCO	DPCO	DPCO
mechanical	1 x 10 ⁷	1 x 10 ⁷	1 x 10 ⁷	5 x 10 ⁶
electrical	15 x 10 ⁴	1 x 10 ⁵	8 x 10 ⁴	1 x 10 ⁵
screws	pozidrive 1			
screw tightening torque	0,6...0,8Nm			
operating conditions	-20 to +60°C non condensing			

* EN 60947-5-1 VDE 0435

Time ranges




The required delay time within the range selected is set using the potentiometer on the front plate

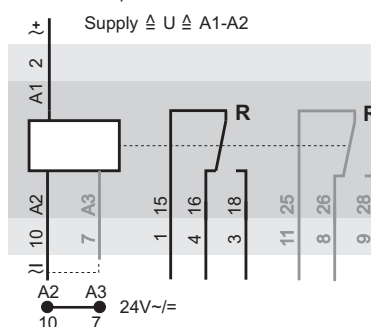

ordering information

part no	supply	output	relay type	c _{FL} R _{TH}	housing types
T101	230V~ / 24V~	6VA / 1W	DPCO	3	No B
T104	115V~ / 24V~	6VA / 1W	DPCO	3	No B
T106	400V~	6VA	SPCO	1	No A
T108	12V~	6VA / 1W	SPCO	2	No A
T109	12V~	6VA / 1W	DPCO	3	No B
T116	115V..230V~/24V~	6VA / 1W	SPCO	2	No A
T141	230V~ / 24V~	6VA / 1W	DPCO	4	No G
T142	230V~ / 24V~	6VA / 1W	SPCO	4	No G
T171	230V~ w. Trafo	2VA	DPCO	4	No G
T172	230V~ w. Trafo	2VA	SPCO	4	No G

other voltages on request




ITT16



overview

- ◆ zoom supply voltage
- ◆ 3 toggle functions
- ◆ 4 flip-flop functions
- ◆ 3 timerelay functions
- ◆ DPCO output relay
- ◆ LED Indicators for power supply, failure, output relay, control contacts and timer
- ◆ 22.5mm DIN rail mount housing

Tse – Toggle with starting contact and enable

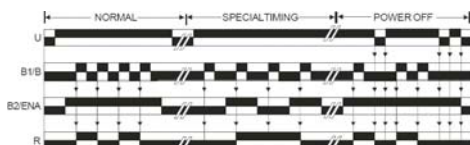

Fsc - Flip-Flop with starting contact and prior reset



specification

supply voltage variation	nominal voltage -20%..+10%
frequency range	48 - 63 Hz
duty cycle	100%
repeat accuracy	< 1%
output relay specification	max. 6A 230V~ 24V/1,5A 115V/1,5A 230V/1,5A 24V/1,5A
expected life time	DPCO
mechanical	10 x 10 ⁶ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6...0,8Nm
operating conditions	-20 to +60 °C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	sup.galv.iso*	housing types
ITT16	24V~ / 115...230V~	6VA / 1W DPCO	yes	L

* The measurement input is galvanically isolated from the power supply

DES/PES/TES


overview

- ◆ supply voltage 12-240V~
or 200-440V~
- ◆ thyristor output 700mA max.
- ◆ 6 selectable time ranges (DES/PES)
0.1sec - 10Hrs
- ◆ 11.25mm or 22.5mm rail mount housing
or 11pin plug in housing



On delay with thyristor output

Supply voltage on
Supply voltage off
Thyristor open
Thyristor closed

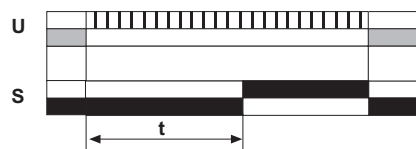

Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage, time delay t commences. At the end of the time delay the thyristor switches the full supply voltage through to the load connected to the A2 terminal (max. load 700mA continuous, 20A <10mS). If the supply voltage is removed during time t , the unexpired time will be cancelled and the timer will reset.


Note:

A small leakage current (2 - 2.5mA) passes through the thyristor during the timing period. Care should be taken to ensure that very sensitive devices connected to the A2 terminal are not affected.

Time ranges (DES/PES)



The required delay time within the range selected is set using the potentiometer on the front plate.



specification

supply voltage variation	nominal voltage +10% / -15%
frequency range	50 - 60 Hz
duty cycle	100%
repeat accuracy	≤ 100% of the selected range
thyristor output	$I_{max} = 700mA$ $I_{min} = 5mA$ $I_{peak} = 20A (<10ms)$ $I_{leakage} = 2,5mA \sim 2mA =$
drop out voltage	5V
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60 °C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	consumption	output	time ranges	housing type
DES	12-240V~	2,5mA	thyristor	6/0,1s...10h	A
PES	12-240V~	2,5mA	thyristor	6/0,1s...10h	G
TES	200-440V~	1mA	thyristor	1/1...10s	O


on delay with thyristor output





On delay with constant supply, contact start, contact interruptible

- Starting contact S at B1 closed
Starting contact S at B1 open
- Supply voltage(U) on
Supply voltage(U) off
- Output relay contact closed
Output relay contact open



Remove supply voltage before making any changes to either time range or timing function.

On the application of the supply voltage the time relay energises ready for the timing cycle.

When the starting contact **S** is closed the time delay starts.

At the end of the time delay the output relay pulls in.

If the start contact is opened during time **t** the time delay pauses and recommences when the start contact is closed.

When the supply voltage is removed the output relay drops out and the time relay resets ready for the next timing cycle.


If the supply voltage is removed during time **t**, the output relay will drop out, the unexpired time will be cancelled and the time relay will reset.

This time relay can be energised with the start contact closed in which case the on-delay time period will start immediately in the same way.

Time ranges



The required delay time within the range selected is set using the potentiometer on the front plate.



DER-M

overview

- ◆ supply voltage 24-240V~
- ◆ SPCO output relay
- ◆ 7 selectable time ranges 0.1sec - 30Hrs
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing

specification

supply voltage variation	nominal voltage +5% / -10%
frequency range	0-150 Hz
max. delay time	100% of the selected time range
repeat accuracy	< 1% of the selected range
output relay specification	max. 10A 230V~
Ue/Ie AC-15	120V/5A 240V/4A
Ue/Ie DC-13	24V/4A
expected life time	SPCO
mechanical	1 x 10 ⁷ operations
electrical	1 x 10 ⁵ operations
screws	pozidrive 1
screw tightening torque	0,6..0,8Nm
operating conditions	-20 to +60°C non condensing

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type	housing types
DER-M	24 - 240V~	2VA	SPCO	A

PRER2/TOE/TOR


overview

- ◆ dual voltage supply
- ◆ 2 x SPCO output relay
- ◆ 6 selectable time ranges 0.1sec - 10Hrs
- ◆ PRER2: 5 timing functions selected by dip switch
- TOE: on delay - instantaneous contact
- TOR: off delay - instantaneous contact
- ◆ LED indicators for power supply and relay status
- ◆ 22.5mm DIN rail mount housing or 11pin plug in housing



on / off delay - instantaneous contact (PRER2)

- Starting contact S on Pin 5 closed
- Starting contact S on Pin 5 open
- Supply voltage (U) on
- Supply voltage (U) off
- Output relay contact closed
- Output relay contact open

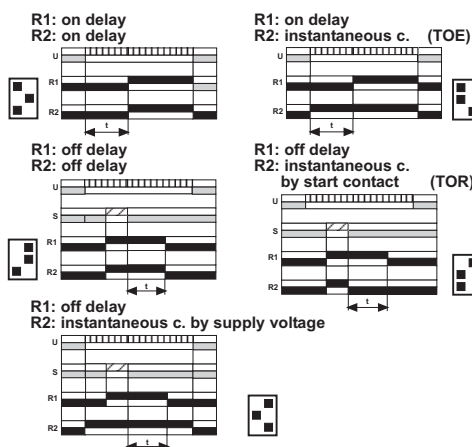


Remove supply voltage before making any changes to either time range or timing function.

Time ranges (PRER2, TOE, TOR)



The required delay time within the range selected is set using the potentiometer on the front plate

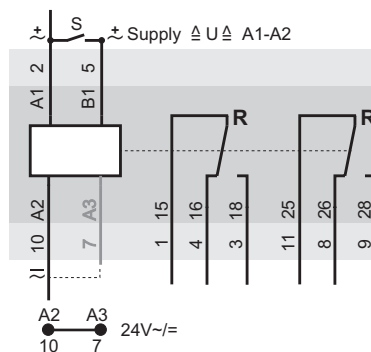


specification

supply voltage variation	nominal voltage +10% / -15%			
frequency range	48 - 63 Hz			
max. delay time	100% of the selected range			
repeat accuracy	< 1% of the selected range			
relaytype	1	2		
output relay specification				
le AC-15*	250V~	6A	1A	
le DC-13*	30V=	4A	1,5A	
expected life time				
mechanical	1 x 10 ⁷ resp. 1 x 10 ⁷ operations			
electrical	1 x 10 ⁵ resp. 1 x 10 ⁵ operations			
screws	pozidrive 1			
screw tightening torque	0,6..0,8Nm			
operating conditions	-20 to +60°C non condensing			

* EN 60947-5-1 VDE 0435

ordering information

part no	supply	output	relay type		housing type	
PRER2 230V/24V	230V~/24V~	6VA/1W	2 SPCO	1	-	G
PRER2 115V/24V	115V~/24V~	6VA/1W	2 SPCO	1	-	G
TOE 230V/24V	230V~/24V~	6VA/1W	2 SPCO	2	-	B
TOE 115V/24V	115V~/24V~	6VA/1W	2 SPCO	2	-	B
TOR 230V/24V	230V~/24V~	6VA/1W	2 SPCO	2	-	B
TOR 115V/24V	115V~/24V~	6VA/1W	2 SPCO	2	-	B

time relays with times & instantaneous contact

