


product type designation

product description

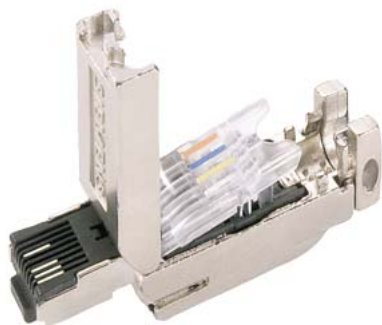

IE FC RJ45 Plug 180 (2x2)

RJ45 data connector

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbit/s) with rugged metal enclosure and FC connection system, for IE FC TP cable 2x 2; 180° cable outlet 1 pack = 1 unit.

Technical Product Detail Page

<https://l.siemens.com/1P6GK1901-1BB10-2AA0>

suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

transfer rate

| | |
|---|----------------|
| transfer rate / for Industrial Ethernet | 10, 100 Mbit/s |
|---|----------------|

interfaces

number of electrical connections

- | | |
|--|---|
| <ul style="list-style-type: none"> for Industrial Ethernet FC TP cables | 4 |
| <ul style="list-style-type: none"> for network components or terminal equipment | 1 |

type of electrical connection

- | | |
|--|---|
| <ul style="list-style-type: none"> for Industrial Ethernet FC TP cables | integrated cut-and-clamp contacts for 4-wire TP FC installation cable AWG22 |
| <ul style="list-style-type: none"> for network components or terminal equipment | RJ45 connector |

type of electrical connection / FastConnect

Yes

mechanical data

| | |
|-----------------------------|-------|
| material / of the enclosure | metal |
|-----------------------------|-------|

| | |
|------------------|----|
| number of reuses | 10 |
|------------------|----|

| | |
|--------------------------|-------|
| locking mechanism design | other |
|--------------------------|-------|

design, dimensions and weights

| | |
|----------------------|-------------------|
| type of cable outlet | 180° cable outlet |
|----------------------|-------------------|

| | |
|-------|---------|
| width | 13.7 mm |
|-------|---------|

| | |
|--------|-------|
| height | 16 mm |
|--------|-------|

| | |
|-------|-------|
| depth | 55 mm |
|-------|-------|

| | |
|------------|------|
| net weight | 35 g |
|------------|------|

| | |
|---------------------------------|----------------|
| connectable cable cross-section | 6.5 ... 6.5 mm |
|---------------------------------|----------------|

| | |
|-------------------------------------|----------------------|
| connectable conductor cross-section | 0.33 mm ² |
|-------------------------------------|----------------------|

ambient conditions

ambient temperature

- | | |
|--|----------------|
| <ul style="list-style-type: none"> during operation | -40 ... +85 °C |
| <ul style="list-style-type: none"> during storage | -40 ... +85 °C |
| <ul style="list-style-type: none"> during transport | -40 ... +85 °C |

relative humidity

- | | |
|--|------|
| <ul style="list-style-type: none"> at 25 °C / without condensation / during operation / maximum | 95 % |
|--|------|

| | |
|---------------------|------|
| protection class IP | IP20 |
|---------------------|------|

product features, product functions, product components / general

product feature

- | | |
|--|-----|
| <ul style="list-style-type: none"> PoE capability | Yes |
|--|-----|

| | |
|-------------------|-----|
| • PoE+ capability | Yes |
| • silicon-free | Yes |
| product component | |
| • strain relief | Yes |

standards, specifications, approvals

| | |
|--|---------|
| certificate of suitability | |
| • RoHS conformity | Yes |
| • UL approval | Yes |
| • cULus approval | Yes |
| • railway application in accordance with EN 50155 | No |
| resistance to air pollution / conformity according to ANSI/ISA-71.04 | Yes; G3 |
| standard for structured cabling | Cat5 |

standards, specifications, approvals / Environmental Product Declaration

| | |
|-----------------------------------|-----------|
| Environmental Product Declaration | Yes |
| global warming potential [CO2 eq] | |
| • total | 0.277 kg |
| • during manufacturing | 0.263 kg |
| • during operation | 0.0086 kg |
| • after end of life | 0.0062 kg |

further information / internet links

| | |
|---|---|
| internet link | |
| • to website: Selection guide for cables and connectors | https://support.industry.siemens.com/cs/ww/en/view/109766358 |
| • to web page: selection aid TIA Selection Tool | https://www.siemens.com/tstcloud |
| • to website: Industrial communication | https://www.siemens.com/simatic-net |
| • to web page: SiePortal | https://sieportal.siemens.com |
| • to website: Image database | https://www.automation.siemens.com/bilddb |
| • to website: CAX-Download-Manager | https://www.siemens.com/cax |
| • to website: Industry Online Support | https://support.industry.siemens.com |

security information

| | |
|----------------------|---|
| security information | <p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert. (V4.7)</p> |
|----------------------|---|

Approvals / Certificates

General Product Approval

[Declaration of Conformity](#)



[China RoHS](#)



[Miscellaneous](#)

| General Product Approval | Test Certificates | Maritime application | Environment |
|--------------------------|-------------------|----------------------|-------------|
|--------------------------|-------------------|----------------------|-------------|



[Special Test Certificate](#)



[PROFINET](#)

last modified:

10/30/2025 